

Professional Series



Green Power



Environmental Friendly



Energy Saving



PowerBox X Series Line Interactive UPS



- Built-in Nimitz™ Surge Protection
- 5 Years Connected Equipment Coverage Up to RM6,000
- Award Winning Sleek & Glossy Design
- Boost & Buck AVR
- Sealed Lead Maintenance Free Battery - YUASA/Shimatsu Battery
- Built-in EMI/RFI Noise Filter
- Tel/Modem/ Fax & Data Line Protection
- Comes with USB Port & Power Management Software



• Boost & Buck AVR



• Long Back-up Time



• Software •





• 3 Years Warranty

Professional Series



RIGHT POWER

The Power Of Continuity

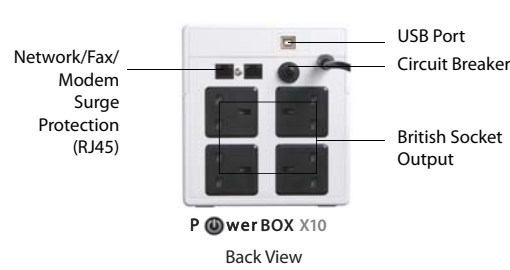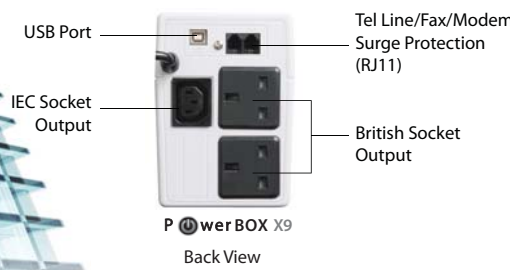

The **1st** UPS in World come with surge & lightning connected equipment warranty
RM4,000.00*

The **1st** UPS in World come with surge & lightning connected equipment warranty
RM6,000.00*

Technical Specification:

MODEL	PowerBox X9	PowerBox X10
CAPACITY (VA/WATTS)	800VA / 420W	1000VA/ 600W
INSURANCE COVERAGE		
LIABILITY COVERAGE	Equipment Coverage up to RM4,000	Equipment Coverage up to RM6,000
INPUT		
INPUT VOLTAGE	220V/230V/240V	
VOLTAGE RANGE	162 - 290Vac	
INPUT FREQUENCY	50Hz - 60Hz (Auto-Sensing)	
OUTPUT		
OUTPUT VOLTAGE	220V/230V/240V	
VOLTAGE REGULATION (BATT.MODE)	+/-6%	
OUTPUT FREQUENCY	50Hz or 60Hz +/-1Hz	
OUTPUT WAVEFORM	Modified Sinewave	
TRANSFER TIME (Typical)	2ms - 6ms	
OUTPUT SOCKET	2 x British + 1 x IEC Socket	4 x British Socket
BATTERY		
SEALED LEAD ACID MAINTENANCE FREE BATTERY	12V 7Ah x 1	12V 7Ah x 2
BACK UP TIME (Depending on Load)	Up to 40 Minutes	Up to 60 Minutes
RECHARGE TIME	4-6 Hours to 90% After Complete Discharge	
STATUS INDICATOR		
LCD DISPLAY	AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage, Overload, Fault and Low Battery	
AUDIBLE ALARM	Backup Mode, Low Battery, Overload, Battery Replacement, Fault	
COMMUNICATION		
POWER MANAGEMENT SOFTWARE	Support Window Family, Linux, Sun Solaris, IBM Aix, Compaq True 64, FreeBSD, HP-UX, MAC	
	- Automatically Shut-down, Saves Application Data Before Exit	- Power Flow Display for Monitoring UPS Status
	- Schedules System Shutdown/Restart	- Warning Notification Via E-Mail/Pager/Broadcast
	- Remote Monitor/Control via LAN	- Safety Shutdown Multi System
	- Records Logs for Analysis	
INTERFACE	USB Port	
SURGE PROTECTION & FILTERING		
FULL PROTECTION	Discharge, Overcharge and Overload Protection	
LIGHTNING, SURGE PROTECTION	Built-in Nimitz™ Surge & Lightning Protector up to >1580 Joules	Built-in Nimitz™ Surge & Lightning Protector up to >1920 Joules
MAXIMUM CURRENT SURGE UP TO	37,200Amps	51,400Amps
PHONE/FAX/MODEM/NETWORK PROTECTION	RJ 11 (1 in 1 out)	RJ 45 (1 in 1 out)
PHYSICAL		
OPERATING ENVIRONMENT	0-90%, Relative Humidity (Non-Condensing)	
NOISE LEVEL	Less than 40dB	
DIMENSION (D x W x H)mm	287 x 100 x 142	350 x 146 x 160
WEIGHT (KG)	4.9	8
WARRANTY		
UPS WARRANTY	3 Years Full Warranty For UPS Include Parts & Labour 2 Years Warranty for Battery	

*Specification subjects to change without prior notice

